
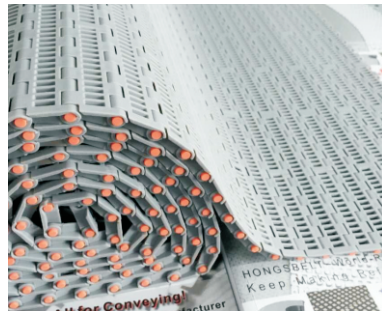
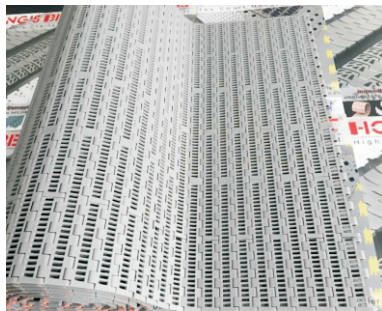


## HS-1001B Technical Data Sheet

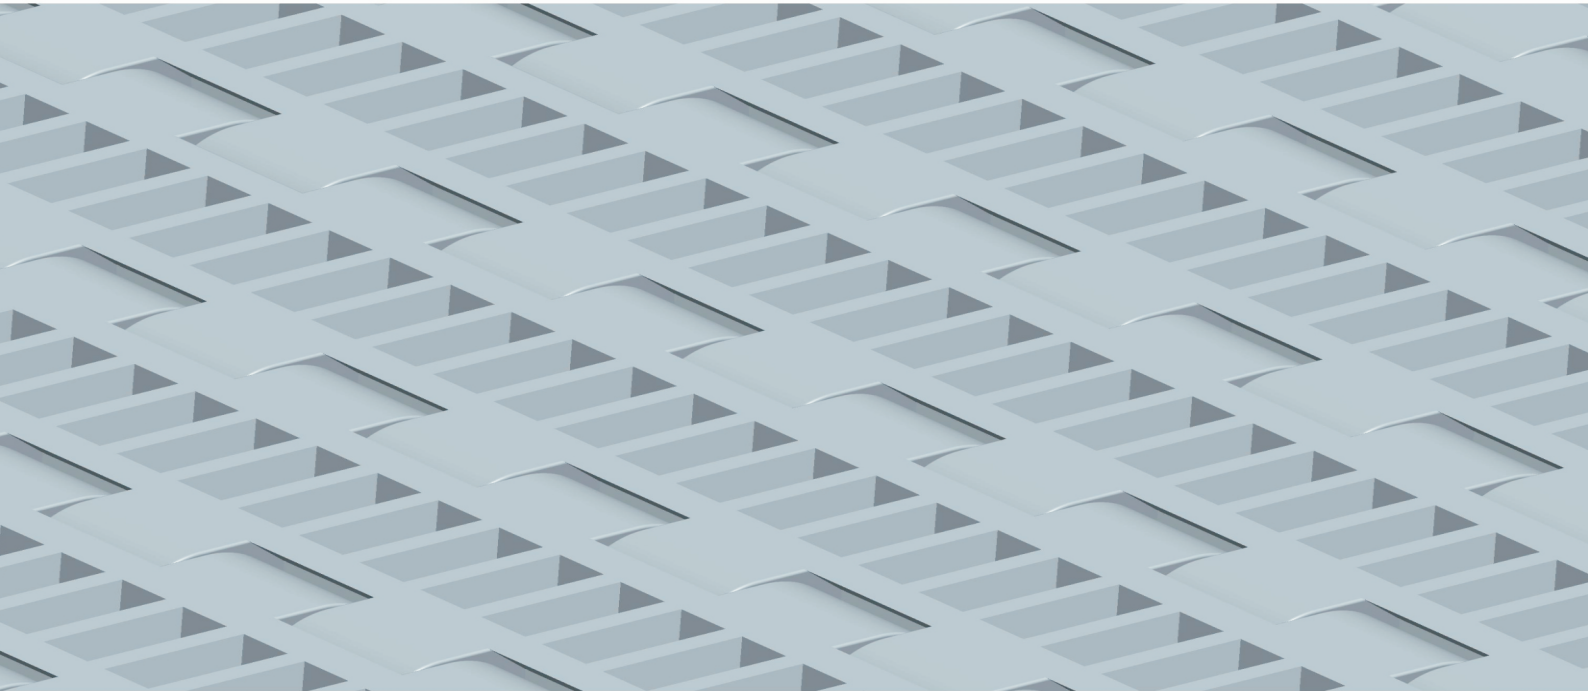

<p>Pitch : 19mm                  Minimum Width : 77mm                  Open Area : 27%                  Approved : FDA                  Rod : Ø 4.5mm                  Flight : Yes                  Side Guard : No                  Curve : No</p>	
--	--

### Data

Belt Material	Belt Strength			Temperature		Belt Weight (Kg/M <sup>2</sup> )
	Straight		Curve	°C (min.)	°C (max.)	
	Kg/M(BW)	N/M(BW)				
Polypropylene	1420	14200	--	1	100	4.4
Polyethylene	1210	12100	--	-60	60	4.6
Acetal	2025	20250	--	-40	80	6.0
Nylon	1500	15000	--	1	180	4.7

BW – Belt Width

### Color Table

Polypropylene					Polyethylene					Acetal					Nylon				
W	G	N	DB	B	W	G	N	DB	B	W	G	N	DB	B	W	G	N	DB	B
●	●						●			●						●			

W-White, G-Gray, N-Nature, DB-Dark brown, B-Blue (For more information of belt color, pls consult our sales team)

### Friction Table


Belt Material	Friction Wear strips & Products							
	UHMW	HDPE	Steel	Glass	SUS	Plastic	Cardboard	Aluminum
Polypropylene	0.32	0.24	0.15	0.09	0.13	0.08	0.15	0.25
Polyethylene	0.13	0.11	0.26	0.19	0.31	0.16	0.21	0.41
Acetal	0.11	0.09	0.27	0.16	0.26	0.15	0.19	0.28
Nylon	0.18	0.13	0.25	0.16	0.26	0.16	0.19	0.27

SUS – Stainless Steel

### Equivalent type with other Brand

Brand Name	Intralox	Habasit	UNI	Rexnord	MCC	ScanBelt
Series & Type	--	--	--	--	--	--


The above content is only for reference.

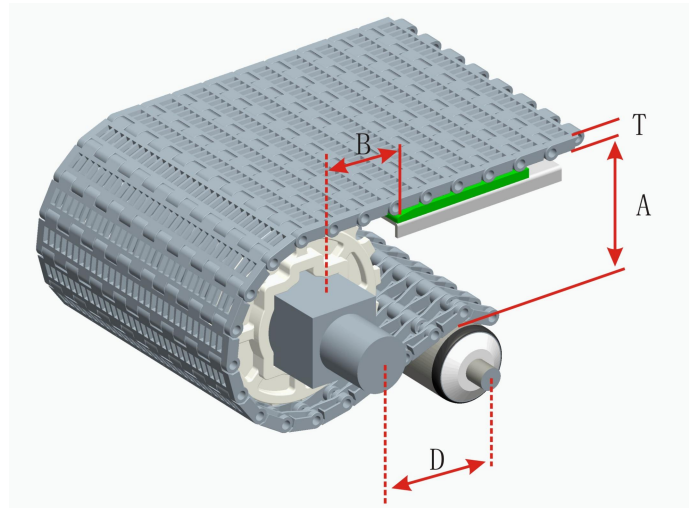

**Conveyor Frame Dimensions**

Unit : mm

No. Teeth	A ( Min.)	B ( Min.)	C ( Max.)	D ( Min.)	T
7	17	31.25	16.75	200	8.5
10	26.25	40.5	26	200	
17	47.5	61.75	47.25	200	
24	68.5	82.75	68.25	200	

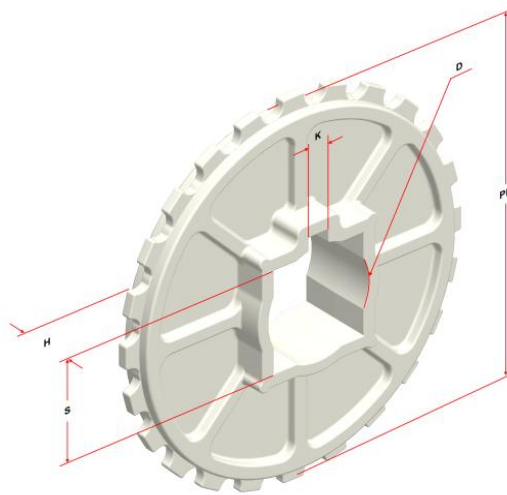

**Sprocket Dimensions**

Unit: mm

No. Teeth	PD	OD	S	D	H	K
7	43.79	42.5	--	20/25	12	6X6
10	61.49	61	--	25	20	8X8
17	103.40	103.5	38.1/40	25.4/30/31.75/40/45/47	30	8X8
24	145.56	145.5	38.1/40	25.4/30/35/38/40/45	30	8X8