

## HS-1060 TAB SERIES



Materials







Sprockets



Applications

**Plate Materials:** POM-DP,POM-LF

**Pin Material:** Cold rolled austenitic stainless steel

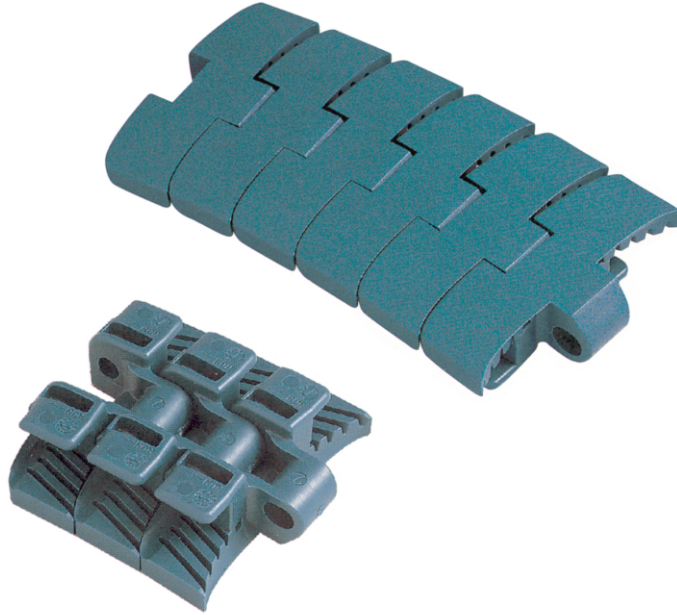

Dimension	mm	inches
P	25.4	1.000
W	83.8	3.300
E	8.6	0.340
T	12.7	0.500
F	12.2	0.480
M	61.5	2.421
N	45.0	1.771
S	10.0	0.394
Q	42.0	1.654
V	20.0	0.787
C	70.0	2.756
H1	16.0	0.630
H2	12.0	0.472

### HS-1060 TAB (Side Flexing Plastic Chain)

#### CHARACTERISTICS

	Width W		Working Load		Radius		Reverse Radius		Weight (kg/m)
	(mm)	(inch)	N(21°C)	lbs(21°C)	(mm)	(inch)	(mm)	(inch)	
HS-1060 TAB-K330	83.8	3.30	1890	425	500	19.69	130	5.12	2.13