

HS-1702 SERIES



Materials







Sprockets



Applications

Plate Materials: POM-DP, POM-LF

Pin Material: Cold rolled austenitic stainless steel

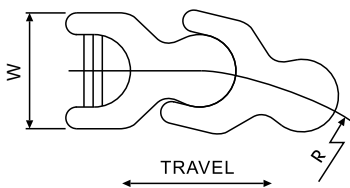

Dimension	mm	inches
P	50.0	1.969
R	150.0	5.906
W	53.2	2.094
H	25.0	0.984
T	4.8	0.189
S	2.0	0.079
E	8.0	0.315
RD	50.0	1.969
GC(Straight)	59.5	2.343
GC(Curve)	56.8	2.236

HS-1702 (Side Flexing Keel Chains)

CHARACTERISTICS

	Width W		Working Load		Radius		Reverse Radius		Weight (kg/m)
	(mm)	(inch)	N(21°C)	lbs(21°C)	(mm)	(inch)	(mm)	(inch)	
HS-1702	53.2	2.09	2669	600	150	5.90	50	1.97	1.55