

HS-40/50/60P SERIES



Materials





Sprockets



Applications

Plate Materials: POM-DP,POM-LF

Pin Material: Cold rolled austenitic stainless steel

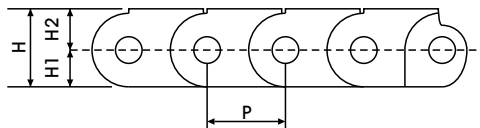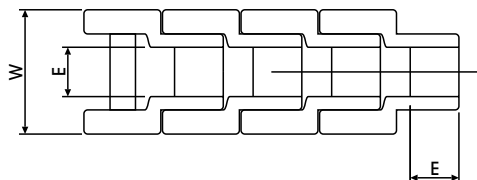

HS-40/50/60P (Straight Running Plastic Chain)

CHARACTERISTICS

	P (mm)	E (mm)	W (mm)	H (mm)	H1 (mm)	H2 (mm)	Working Load KN	Weight (kg/m)
HS-40P	12.70	7.95	20.0	12.7	6.0	6.7	0.44	0.36
HS-50P	15.87	9.53	22.5	15.0	7.0	8.0	0.69	0.46
HS-60P	19.05	12.7	30.0	17.3	8.5	8.8	0.88	0.72