

## HS-915 SERIES



Materials



Sprockets




Applications

**Plate Materials:** S, SS-4, SS

**Pin Material:** Case hardened seetl(for carbon steel chains)

Cold rolled austenitic stainless steel(for stainless steel chains)

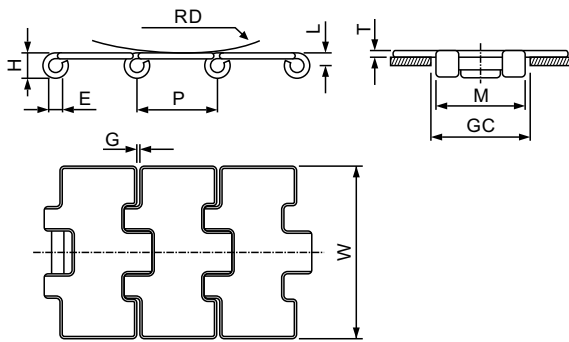

Dimension	mm	inches
P	38.1	1.500
T	3.0	0.118
M	42.0	1.654
L	6.4	0.252
H	13.0	0.512
E	6.4	0.250
G	1.6	0.063
RD	150.0	5.906
GC	44.0	1.732

### HS-915 (Straight Running-Single Hinge)

#### CHARACTERISTICS

	Width W		Working Load		Sideflexing Radius		Weight (kg/m)
	(mm)	(inch)	N(21°C)	lbs(21°C)	(mm)	(inch)	
HS-S 915 K3 1/4	82.6	3.25	12300	2768	-	-	2.73
HS-S 915 K4	101.6	4.00	12300	2768	-	-	3.20
HS-S 915 K4 1/2	114.3	4.50	12300	2768	-	-	3.48
HS-S 915 K6	152.4	6.00	12300	2768	-	-	4.38
HS-S 915 K7 1/2	190.5	7.50	12300	2768	-	-	5.27
HS-SS 915-4K3 1/4	82.6	3.25	5800	1305	-	-	2.52
HS-SS 915-4K83.8	83.8	3.30	5800	1305	-	-	2.55
HS-SS 915-4K4 1/2	114.3	4.50	5800	1305	-	-	3.21
HS-SS 915-4K7 1/2	190.5	7.50	5800	1305	-	-	4.87
HS-SS 915 K3 1/4	82.6	3.25	5600	1260	-	-	2.73
HS-SS 915 K4	101.6	4.00	5600	1260	-	-	3.20
HS-SS 915 K4 1/2	114.3	4.50	5600	1260	-	-	3.48
HS-SS 915 K6	152.4	6.00	5600	1260	-	-	4.38
HS-SS 915 K7 1/2	190.5	7.50	5600	1260	-	-	5.27