

# LBP Chains (Low Back-line Pressure)



Materials



Sprockets



Applications

## HS-LBP 882TAB

SUPER PERFORMANCE ACETAL RESIN

Plates in self-lubricating low friction acetal resin, dark grey-coloured.  
pins in special chrome-nickel stainless steel, work hardened for high resistance.

### PRODUCT CODES

HS-LBP 882TAB-K750

HS-LBP 882TAB-K1000


HS-LBP 882TAB-K1200

### CHARACTERISTICS




	CODE	Material		Breaking Load N	Width L		R min.	SC		Weight kg/m
		Plate	Roller		mm	inches		Straight	Curving	
HS-LBP 882TAB-K750	11072	<b>LFG</b> Dark Grey	Water Blue	10000	190.5	7.1/2	610	60	58	6.00
HS-LBP 882TAB-K1000	11069				254	10				
HS-LBP 882TAB-K1200	11068				304.8	12				

-Standard shipping lengths=80 pitches=10 feet=3,048 metres.




-These chains can be supplied either with pins in austenitic stainless steel, work hardened, highly wear resistant, or with pins in thermoplastic resin.

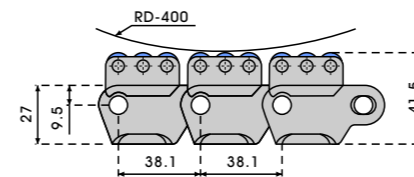

HS-LBP 882TAB K750

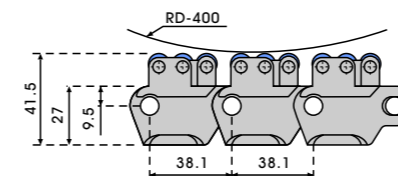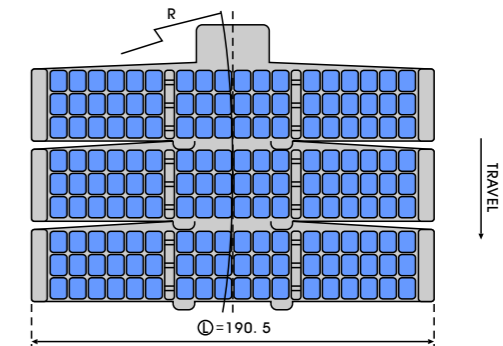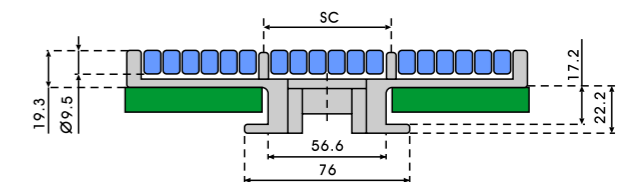

HS-LBP 882TAB K1000

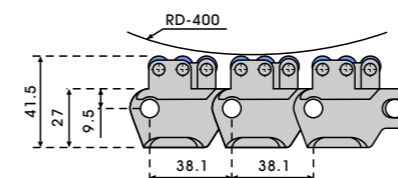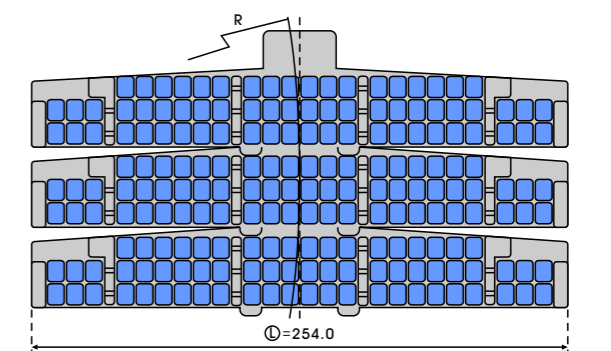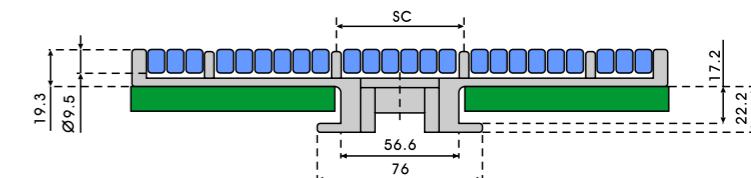

HS-LBP 882TAB K1200

